

LifeSmart

Indoor Camera




LS258

Indoor Camera

Security from every angle with omni rotatable lens



IR Night Vision



Two-way Talk



Motion Detection



Pan and Tilt



1080P



Remote Monitoring Via
Mobile App



Notifications via
Mobile App



Communicates with
other devices



Micro SD
Storage




Protection 24/7

Automatically switch between day and night mode.
8m(26ft) distance night vision. Keep video clear
as night falls.



Two-way Talk With Built-in MIC And Speaker

Let you talk and listen via mobile app, so you can talk with your pets or family members and hear what is happening in your home.

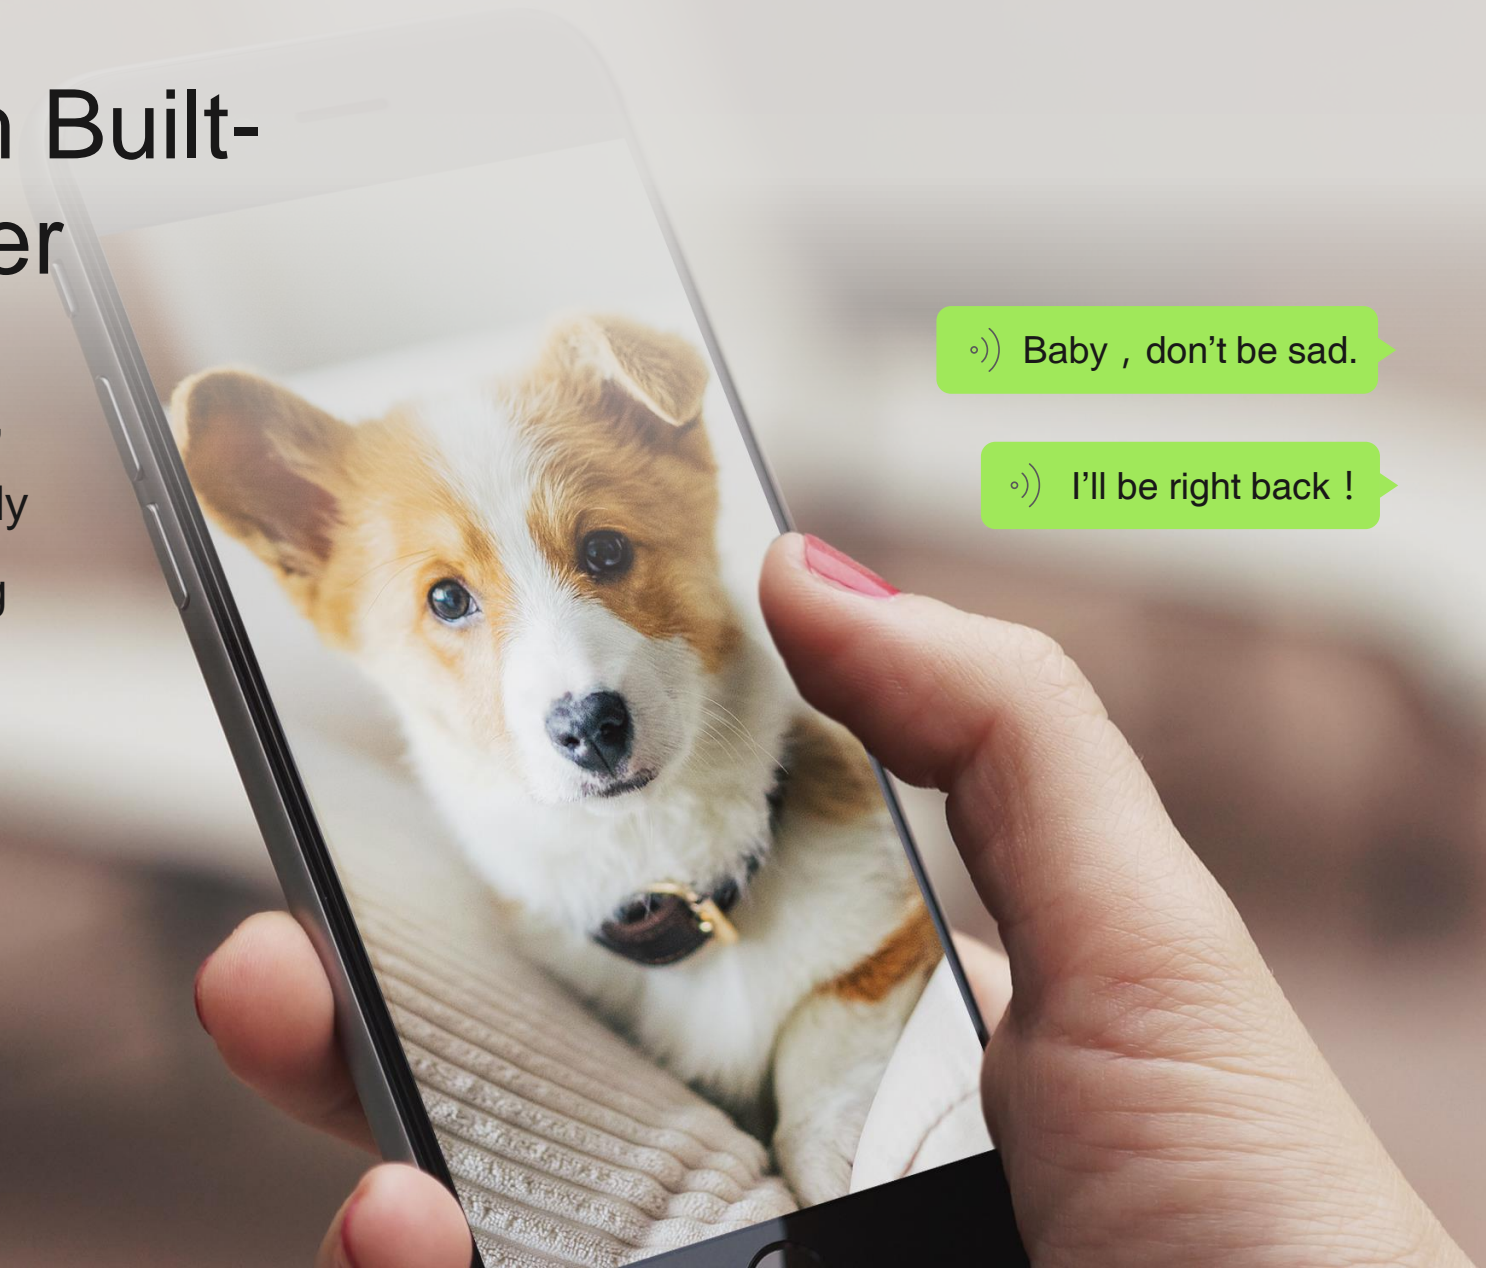

345°* 90° Pan and Tilt Peace of Mind at Every Corner

Freely rotate to monitor the whole-home
without missing any significant moment.



1080P High Image Definition

Adopts extreme imaging technology to present a full HD video

1080P < > 720P
(200MP)



Captures the Abnormal Motion and Communicates with Other Smart Devices

It's a must and important feature that home cameras should support. Make you aware of all abnormal states at home and never miss the moving objects.



Multiple Installation Modes for Selection



Plug and Play



Wall Mount
Ceiling Mount

1/2.9" Full HD CMOS Sensor

High resolution, ICR



IR LEDs *8

8m(26feet) night vision

MIC in

ABS Casing

φ70*110mm

LED Indicator

Blue & Red LED Indicator



Micro SD Slot

Supports max. 128GB storage

Speaker out


Reset Button

Power Interface


DC 5V, 1.2A power supply

Multiple Application Scenarios

Baby Room

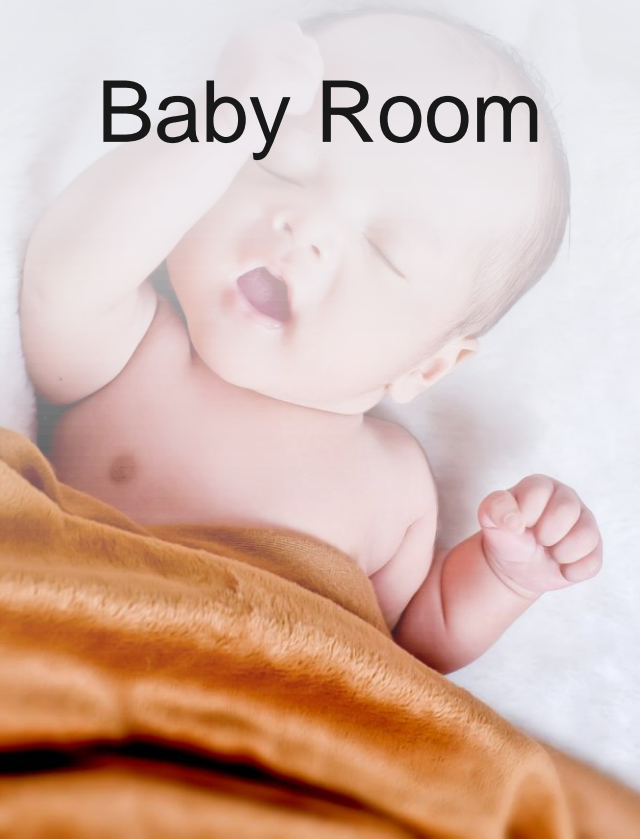

Entrance

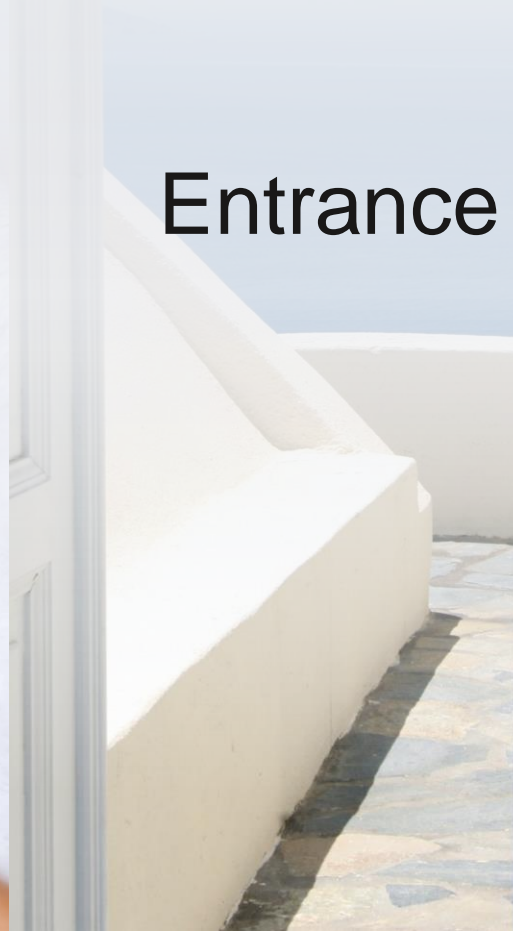

Living Room



Jewelry Room



Specification (LS258)

Dimensions	φ70*110mm
Net Weight	220g
Casing	ABS
Image Sensor	1/2.9" Full HD CMOS Sensor
Effective Pixels	1920(H) × 1080(V)
IR Distance	8m (26ft)
Lens	90°FOV
Pan/Tilt	345°(horizontal), 90°(vertical)
Video Compression	H.264
Features	Motion detection, two-way talk, voice pick up, DWDR, 3D DNR
Wireless Communications	Wi-Fi (2.4GHz)
Wireless Protocol Standard	IEEE802.11b/g/n
Wireless Range	100m (open field)
Power Supply	DC 5V 1.2A
Power Consumption	≤4W
Ingress Protection	Indoor
Installation	Plug and play, wall mount, ceiling mount
Max. Micro SD Storage	128G (16GB--> 4 days, 32GB--> 8 days, 64GB-->16 days, 128GB-->32 days;)
Working Temperature	-5~45°C
Working Humidity	5~90%